



CPC BELGELENDİRME MUAYENE
VE DENEY HİZMETLERİ TİC. LTD.
ŞTİ.

Çamlıca Mah. (Timko Eti) Anadolu Blv.
No:20-R Blok No:4 Yenimahalle/Ankara

www.cpcert.org



Member of



www.eota.eu

European Technical Assessment

**ETA-25/0040
of 28/04/2025**

Technical Assessment Body issuing the European Technical Assessment

CPC Belgelendirme Muayene ve Deney Hizmetleri Tic. Ltd. Şti.

Trade name of the construction product

EASF Vinylester Anchoring Adhesive

Product family to which the construction product belongs

Product Area Code: 33
Bonded fastener for use in concrete

Manufacturer

Handan TEDUN Fastener Group Co. Ltd.

Liuhan Industrial Zone, Yongnian District
057150, Handan City, CHINA

Manufacturing plant

Plant 1

This European Technical Assessment contains

26 pages including 23 Annexes which forms an integral part of
this assessment
Annex may contain confidential information and is/are not
included in the European Technical Assessment when that
assessment is publicly disseminated

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

EAD 330499-02-0601 Bonded Fasteners for Use In Concrete

Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and should be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full (excepted the confidential Annex(es) referred to above). However, partial reproduction may be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction must be identified as such.

1. Technical description of the product

Handan TEDUN Fastener Group has formally submitted a request for a Technical Assessment pertaining to bonded anchors, specifically those designed for non-cracked and cracked concrete, denoted as EASF Vinylester Anchoring Adhesive. The comprehensive evaluation was conducted in adherence to the specifications outlined in EAD 330499-02-0601 [1].

The bonded anchor system comprises a cartridge housing injection mortar, EASF Vinylester Anchoring Adhesive, in conjunction with a steel element. The steel component is composed of a commercially available threaded rod, complete with a washer and hexagon nut, falling within the specified range of M8 to M30 or rebars from Ø8 to Ø32.

The installation process involves inserting the steel element into a pre-drilled aperture that has been filled with injection mortar. The structural integrity is achieved through the synergistic bond formed among the metal component, injection mortar, and the surrounding concrete medium.

For a comprehensive visual representation and detailed product description, please consult Annex A.

2. Specification of the intended use(s) in accordance with the applicable European Assessment Document (hereinafter EAD)

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The provisions made in this European Technical Assessment are based on an assumed working life of the anchor of 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer but are to be regarded only as a means for choosing the products in relation to the expected economically reasonable working life of the works.

3. Performance of the product and references to the methods used for its assessment

3.1. Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance for tension loads	See Annex C1, Annex C2, Annex C6
Characteristic resistance for shear loads	See Annex C3, Annex C4, Annex C7
Displacement	See Annex C5, Annex C8
Characteristic resistance for tension loads, seismic actions	See Annex C9, Annex C10

3.2. Hygiene, health and environment (BWR 3)

No performance determined.

3.3. Safety in use (BWR 4)

For basic requirement safety in use the same criteria are valid as for Basic Requirement Mechanical resistance and stability.

3.4. Sustainable use of natural resources (BWR 7)

For the sustainable use of natural resources, no performance was determined for this product.

3.5. General aspects relating to fitness for use

Durability and serviceability are only ensured if the specifications of intended use according to Annex B 1 are kept.

4. Assessment and verification of constancy of performance (hereinafter AVCP) system applied, with reference to its legal base

According to the Decision 96/582/EC of the European Commission¹ the system of assessment verification of constancy of performance (see Annex V to Regulation (EU) No 305/2011) given in the following table apply.

Product	Intended use	Level or class	System
Metal anchors for use in concrete	For fixing and/or supporting to concrete, structural elements (which contributes to the stability of the works) or heavy units	-	1

5. Technical details necessary for the implementation of the AVCP system, as provided for in the applicable EAD


Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited by the Technical Assessment Body. The notified product certification body shall visit the factory at least once a year for surveillance of the manufacturer.

Issued in Ankara on 28.04.2025


By
UĞUR GEDİK

Installed condition

Installation threaded rod

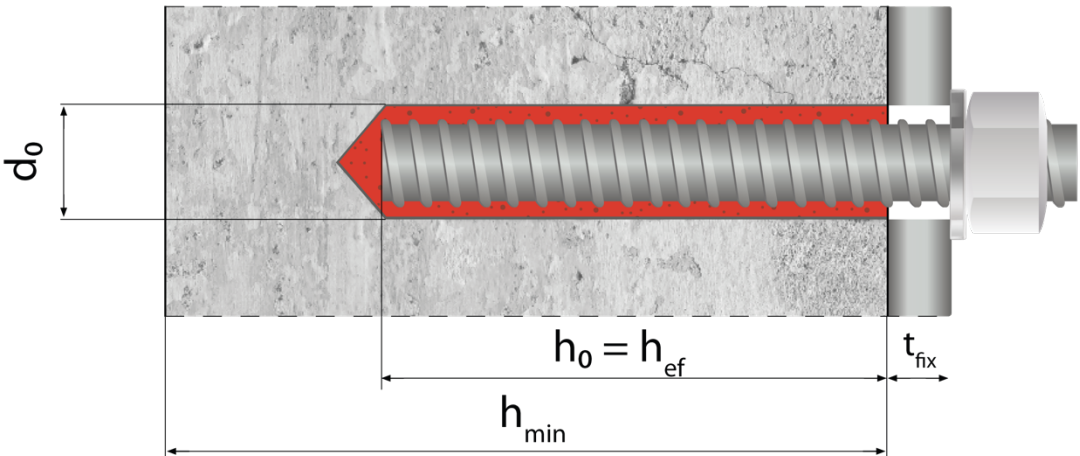

Installation reinforcing bar

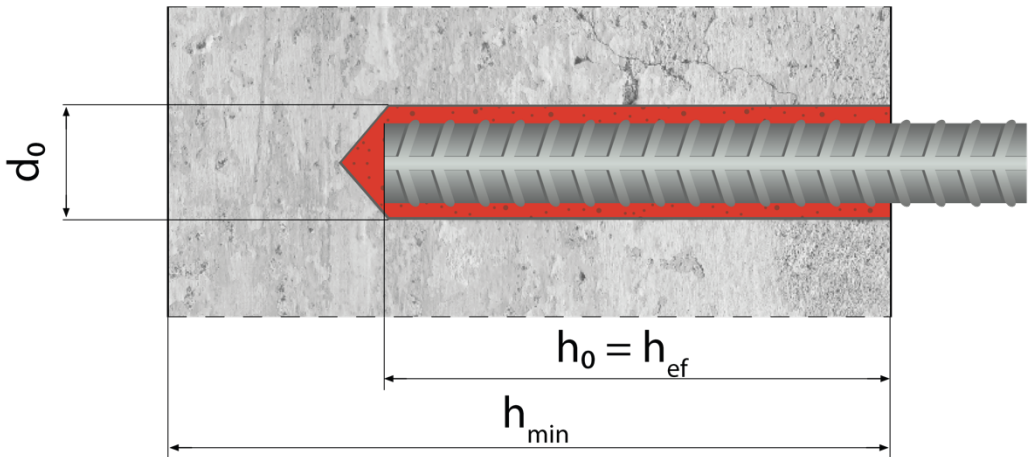

- d_0 : diameter of drill bit
 t_{fix} : thickness of fixture
 h_{ef} : effective anchorage depth
 h_0 : depth of drill hole
 h_{min} : minimum thickness of member

EASF Vinylester Anchoring Adhesive


Product description
Installed condition

Annex A1
of European Technical
Assessment
ETA-25/0040


Injection system

Cartridge: EASF Vinylester

Type: Side-by-side, 345ml up to 360ml

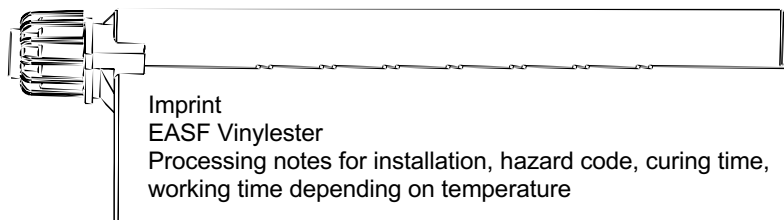

Static mixer



EASF Vinylester Anchoring Adhesive


Product description

Injection system

Annex A2
of European Technical
Assessment
ETA-25/0040

Threaded rod

Threaded rod M8, M10, M12, M16, M20, M24, M27, M30 with washer and hexagon nut

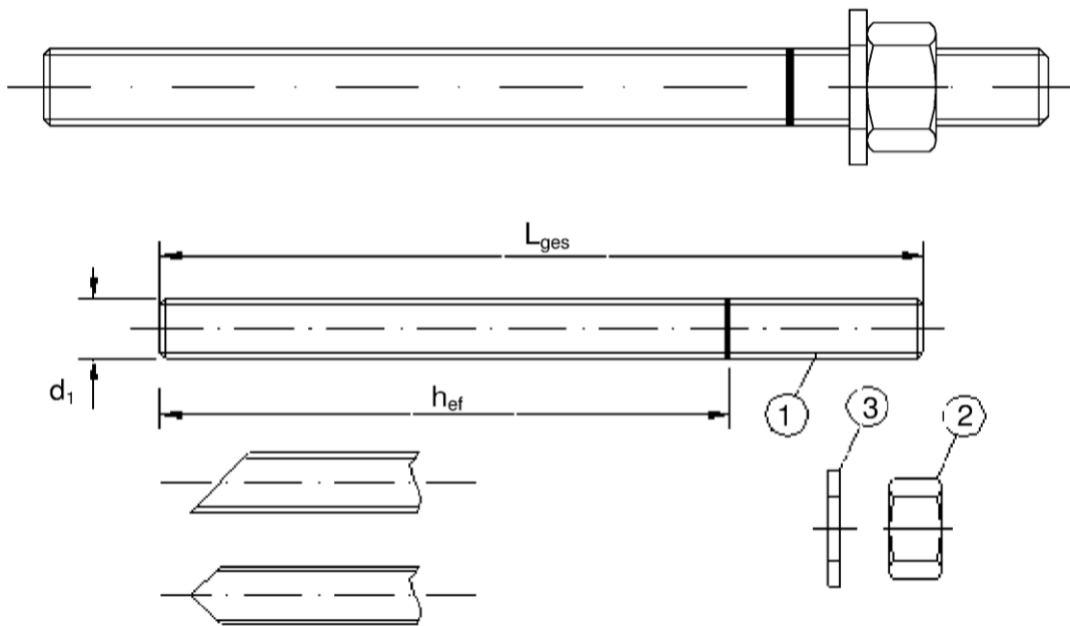

Commercial standard threaded rod with:

- Materials, dimensions, and mechanical properties according to Table A1
- Inspection certificate 3.1 according to EN 10204:2004
- Marking of embedment depth

EASF Vinylester Anchoring Adhesive

Product description

Threaded rod

Annex A3
of European Technical
Assessment
ETA-25/0040


Threaded rod (continuation)

Table A1: Materials – threaded bar

Part	Designation	Material				
Steel, zinc plated (Steel acc. to EN ISO 683-4:2018 or EN 10263:2017) - electroplated ≥ 5 µm acc. to EN ISO 4042:2022 or - hot-dip galvanized ≥ 40 µm acc. to EN ISO 1461:2022 and EN ISO 10684:2004+AC:2009 or - sherardized ≥ 45 µm acc. to EN ISO 17668:2016						
1	Threaded rod	Property Class	Characteristic steel ultimate strength	Characteristic steel yield strength	Fracture elongation	EN ISO 898-1
		4.8	$f_{uk} \geq 400 \text{ N/mm}^2$	$f_{yk} \geq 320 \text{ N/mm}^2$	$A_5 > 8\%$	
		5.8	$f_{uk} \geq 500 \text{ N/mm}^2$	$f_{yk} \geq 400 \text{ N/mm}^2$	$A_5 > 8\%$	
		6.8	$f_{uk} \geq 600 \text{ N/mm}^2$	$f_{yk} \geq 480 \text{ N/mm}^2$	$A_5 > 8\%$	
		8.8	$f_{uk} \geq 800 \text{ N/mm}^2$	$f_{yk} \geq 640 \text{ N/mm}^2$	$A_5 \geq 12\%$	
		9.8	$f_{uk} \geq 900 \text{ N/mm}^2$	$f_{yk} \geq 720 \text{ N/mm}^2$	$A_5 \geq 10\%$	
		10.9	$f_{uk} \geq 1000 \text{ N/mm}^2$	$f_{yk} \geq 900 \text{ N/mm}^2$	$A_5 > 9\%$	
		12.9	$f_{uk} \geq 1200 \text{ N/mm}^2$	$f_{yk} \geq 1080 \text{ N/mm}^2$	$A_5 > 8\%$	
2	Hexagon nut	4	for classes 4.8 rods			EN ISO 898-2
		5	for classes 5.8 rods			
		6	for classes 6.8 rods			
		8	for classes 8.8 rods			
		9	for classes 9.8 rods			
		10	for classes 10.9 rods			
		12	for classes 12.9 rods			
3	Washer	Steel, zinc-plated, hot-dip galvanised or sherardized (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
Stainless steel A2 (Materials 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014) Stainless steel A4 (Materials 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014) High corrosion resistance steel -HCR- (Materials 1.4529 or 1.4565, acc. to EN 10088-1:2014)						
1	Threaded rod	Property Class	Characteristic steel ultimate strength	Characteristic steel yield strength	Fracture elongation	EN ISO 3506-1
		50	$f_{uk} \geq 500 \text{ N/mm}^2$	$f_{yk} \geq 210 \text{ N/mm}^2$	$A_5 \geq 8\%$	
		70	$f_{uk} \geq 700 \text{ N/mm}^2$	$f_{yk} \geq 450 \text{ N/mm}^2$	$A_5 \geq 12\%$	
		80	$f_{uk} \geq 800 \text{ N/mm}^2$	$f_{yk} \geq 600 \text{ N/mm}^2$	$A_5 \geq 12\%$	
2	Hexagon nut	50	for classes 50 rods			EN ISO 3506-1
		70	for classes 70 rods			
		80	for classes 80 rods			
3	Washer	A2: Materials 1.4301 / 1.4307 / 1.4311 / 1.4567 or 1.4541, acc. to EN 10088-1:2014 A4: Materials 1.4401 / 1.4404 / 1.4571 / 1.4362 or 1.4578, acc. to EN 10088-1:2014 HCR: Materials 1.4529 or 1.4565, acc. to EN 10088-1:2014 (e.g.: EN ISO 887:2006, EN ISO 7089:2000, EN ISO 7093:2000 or EN ISO 7094:2000)				
- For anchorages under seismic actions which are designed in accordance with EN 1992-4:2018, Section 9.2 (3), option b): $A_5 \geq 12\%$ and $f_{uk} \leq 800 \text{ N/mm}^2$. - Property class 80 only for stainless steel A4 and HCR.						
EASF Vinylester Anchoring Adhesive					Annex A4 of European Technical Assessment ETA-25/0040	
Product description Threaded rod (continuation)						

Reinforcing bar

Reinforcing bar Ø8, Ø10, Ø12, Ø14, Ø16, Ø20, Ø25, Ø28, Ø32

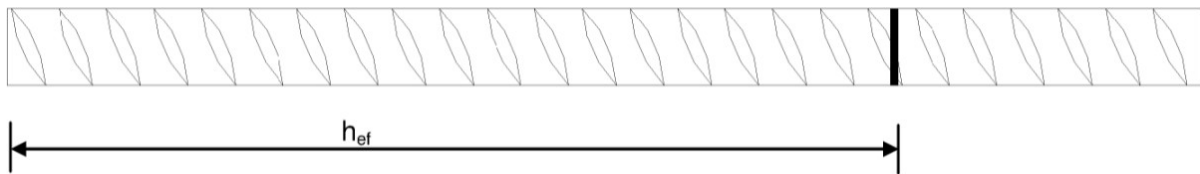

- Minimum value of related rid area $f_{R,min}$ according to EN 1992-1-1:2004+AC:2010
- Rib height of the bar shall be in the range $0,05*d \leq h \leq 0,07*d$
(d: Nominal diameter of the bar, h: Rib height of the bar)

Table A2: Materials – reinforcing bar

Reinforcing bars

1	Rebar EN 1992-1-1:2004+AC:2010, Annex C	Bars and de-coiled rods class B or C f_{yk} and k according to NDP or NCL of EN 1992-1-1/NA:2013 $f_{uk} = f_{tk} = k * f_{yk}$
---	--	---

EASF Vinylester Anchoring Adhesive

Product description

Reinforcing bar

Annex A5
of European Technical
Assessment
ETA-25/0040

Specifications of intended use

Anchorage subject to:

- Static and quasi-static loads: M8 to M30 and Ø8 to Ø32
- Seismic load (C1): M8 to M30 and Ø8 to Ø32

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206-1:2000.
- Strength classes C20/25 to C50/60 according to EN 206-1:2000.
- Cracked and Non-cracked concrete: M8 to M30 and Ø8 to Ø32

Temperature range:

- I: -40°C to +40°C (max long-term temperature + 24 °C max short-term temperature + 40 °C)
- II: -40°C to +80°C (max long-term temperature + 50 °C max short-term temperature + 80 °C)

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (all materials)
- For the other environmental conditions according to EN 1993-1-2:2006+A1 2015 corresponding corrosion resistance classes:
 - Stainless steel A2 according to Annex A 4, Table A1: CRC II
 - Stainless steel A4 according to Annex A 4, Table A1: CRC III
 - High corrosion resistance steel HCR according to Annex A 4, Table A1: CRC V

Design:

- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g., position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Anchorages under static or quasi-static actions are designed in accordance with:
 - EOTA Technical Report TR 029 "Design of bonded anchors", Edition September 2010 or
 - CEN/TS 1992-4:2009

Installation:

- Dry, wet and flooded holes (not sea water).
- Hole drilling by hammer or compressed air drill mode.
- Overhead installation allowed.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- Installation temperature +5°C to +45°C depending on the variant.

EASF Vinylester Anchoring Adhesive

Intended use

Threaded rod and reinforcing bar

Annex A5
of European Technical
Assessment
ETA-25/0040

Installation parameters											
Table B1A: Installation parameters for threaded rod											
Anchor size			M8	M10	M12	M16	M20	M24	M27	M30	
Diameter of anchor bolt or thread diameter	d	mm	8	10	12	16	20	24	27	30	
Nominal diameter of drill bit	d ₀	mm	10	12	14	18	24	28	32	35	
Diameter of clearance hole in the fixture (≤)	d _f	mm	9	12	14	18	22	26	30	33	
Diameter of steel brush (≥)	d _b	mm	12	14	16	20	26	30	34	37	
Minimum effective anchorage depth	h _{ef,min}	mm	60	60	70	80	90	96	108	120	
Maximum effective anchorage depth	h _{ef,max}	mm	160	200	240	320	400	480	540	600	
Minimum thickness of the concrete member	h _{min}	mm	h _{ef} +30mm ≥100mm			h _{ef} + 2*d ₀					
Nominal torque moment	T _{inst}	Nm	10	20	40	80	120	160	180	200	
Thickness of the fixture	t _{fix}	mm	0 < t _{fix} < 1500								
Minimum spacing	s _{min}	mm	40	50	60	80	100	120	135	150	
Minimum edge distance	c _{min}	mm	40	50	60	80	100	120	135	150	
Table B1B: Installation parameters for reinforcing bar											
Anchor size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Diameter of anchor	d	mm	8	10	12	14	16	20	25	28	32
Nominal diameter of drill bit	d ₀	mm	12	14	16	18	20	24	32	35	40
Diameter of steel brush (≥)	d _b	mm	14	16	18	20	22	26	34	37	41
Minimum effective anchorage depth	h _{ef,min}	mm	60	60	70	75	80	90	100	112	128
Maximum effective anchorage depth	h _{ef,max}	mm	160	200	240	280	320	400	500	560	640
Minimum thickness of the concrete member	h _{min}	mm	h _{ef} +30mm ≥100mm			h _{ef} + 2*d ₀					
Minimum spacing	s _{min}	mm	40	50	60	70	80	100	125	140	160
Minimum edge distance	c _{min}	mm	40	50	60	70	80	100	125	140	160

Cleaning and setting tools

Cleaning brush (steel brush with steel bristles)



Table B2: Cleaning and setting parameters

Threaded Rod	d_0	d_b	$d_{b,min}$	Injection Plug
mm	mm	mm	mm	mm
M8	10	12	10,5	Not required to use piston plug
M10	12	14	12,5	
M12	14	16	14,5	
M16	18	20	18,5	
M20	24	26	24,5	24
M24	28	30	28,5	28
M27	32	34	32,5	32
M30	35	37	35,5	35

Rebar	d_0	d_b	$d_{b,min}$	Injection Plug
mm	mm	mm	mm	mm
8	12	14	12,5	Not required to use piston plug
10	14	16	14,5	
12	16	18	16,5	
14	18	20	18,5	
16	20	22	20,5	
20	24	26	24,5	24
25	32	34	32,5	32
28	35	37	35,5	35
32	40	41	40,5	38



Compressed air tool

d_0 between 10mm to 40mm



Hand operated blowing pump

d_0 between 10mm to 20mm



Injection plug for overhead and horizontal installation

d_0 between 24mm to 40mm

EASF Vinylester Anchoring Adhesive

Intended use

Cleaning and setting tools

Annex B2
of European Technical
Assessment
ETA-25/0040

Installation instructions


Drilling of the hole (HD, HDB, CD)




1. **Hammer drilling (HD) / Compressed air drilling (CD)**
Drill with hammer drill a hole into the base material to the size and embedment depth required by the selected anchor according to Table B1A or B1B. Aborted drill holes shall be filled with mortar.
Proceed with Step 2.

Hand blowing pump cleaning (HPC):


covers up to 20mm drill bit diameter in cracked and non-cracked concrete

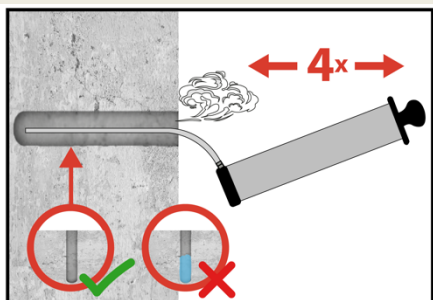

- 2a. **Attention! Standing water in the bore hole must be removed before cleaning.**
Starting from the drill hole bottom blow the hole at least 4 times using the hand pump, until return air stream is free of noticeable dust. If necessary, nozzle extension can be attached to the top of air blow to reach bottom of the hole.

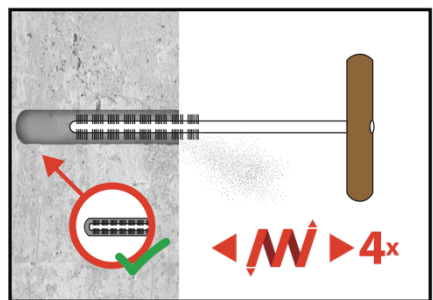

- 2b. Using the specified brush in Annex B2, mechanically brush out the hole at least 4 times over the entire embedment depth in a twisting motion. (If necessary, use brush extension to reach bottom of the hole)

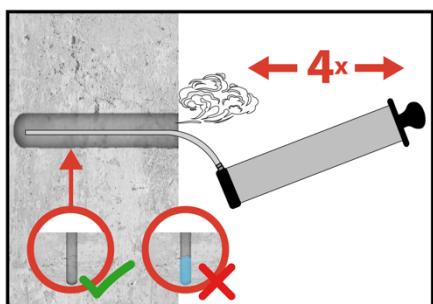

- 2c. Finally, starting from the drill hole bottom, blow at least 4 times with the hand pump. until return air stream is free of noticeable dust. If necessary, nozzle extension can be attached to the top of air blow to reach bottom of the hole.
The hand-pump can only be used for anchor sizes in non-cracked concrete up to bore hole diameter 20mm or embedment depth up to 240mm.
After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning repeated has to be directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

EASF Vinylester Anchoring Adhesive


Installation instructions

Annex B3
of European Technical
Assessment
ETA-25/0040

Installation instructions (continuation)


Compressed air cleaning (CAC):

covers all diameter in cracked and non-cracked concrete

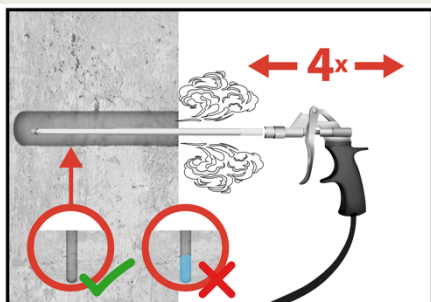


- 2a. **Attention! Standing water in the bore hole must be removed before cleaning.**

Starting from the drill hole bottom blow the hole at least 4 times using the compressed air (min. 6 bar, oil-free, specified in Annex B2) until return air stream is free of noticeable dust. If necessary, nozzle extension can be attached to the top of air blow to reach bottom of the hole.

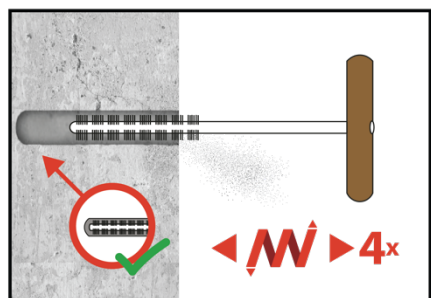


- 2b. Using the specified brush in Annex B2, mechanically brush out the hole at least 4 times over the entire embedment depth in a twisting motion. (If necessary, use brush extension to reach bottom of the hole)

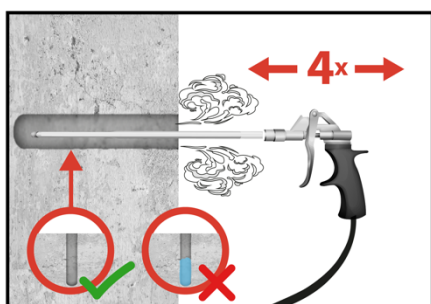

- 2c. Finally, blow the hole at least 4 times using the compressed air (min. 6 bar, oil-free, specified in Annex B2) until return air stream is free of noticeable dust. If necessary, nozzle extension can be attached to the top of air blow to reach bottom of the hole.

After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning repeated has to be directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.

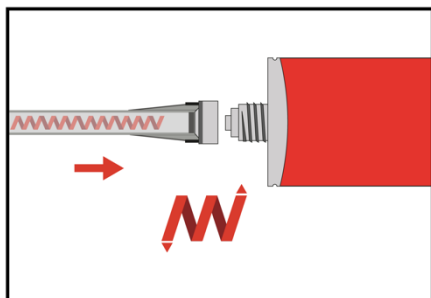


3. Attach supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool.
For every working interruption longer than the maximum working time (Annex B3) as well as for new cartridges, a new static mixer shall be used.

EASF Vinylester Anchoring Adhesive


Installation instructions

Annex B4
of European Technical
Assessment
ETA-25/0040


Installation instructions (continuation)

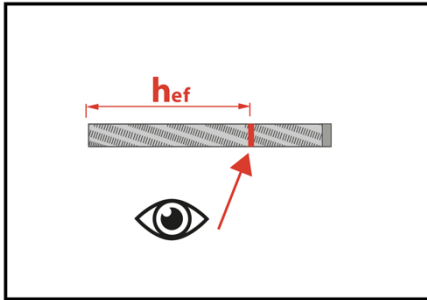


4. Mark embedment depth on the anchor rod, such as threaded rod and rebar.
The anchor rod should be free of dirt, grease, oil or other foreign material.

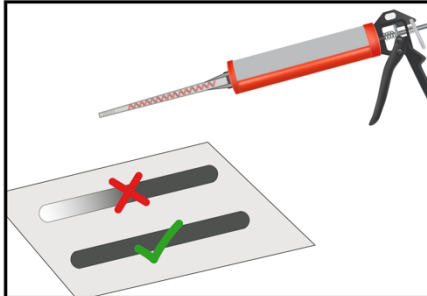


5. Dispense to waste until even colour is obtained (at least 3 full strokes). Discard the uneven coloured first strokes.

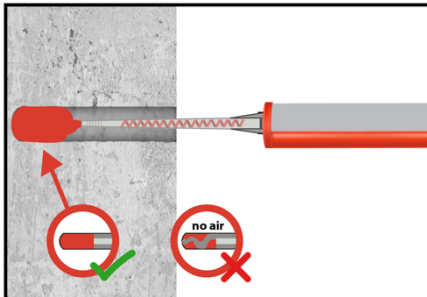

- 6a. **Injecting mortar without using injection plug**
Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw the static mixing nozzle as the hole fills to avoid creating air pockets. Observe the gel-/ working times given in Table B3.

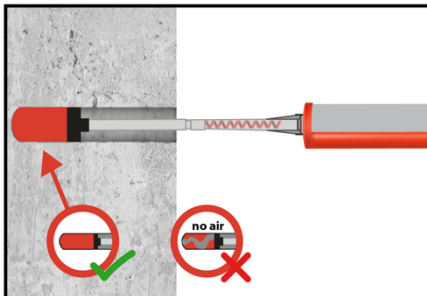

- 6b. **Injecting mortar with using injection plug**
Starting from the bottom or back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. During injection the injection plug is pushed out of the hole by the back pressure of the injected mortar. Observe the gel-/ working times given in Table B3.

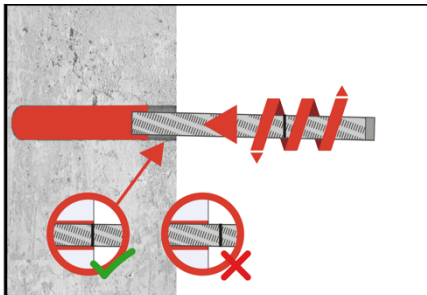


7. Push the threaded rod or reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.

EASF Vinylester Anchoring Adhesive


Installation instructions

Annex B5
of European Technical
Assessment
ETA-25/0040


Installation instructions (continuation)

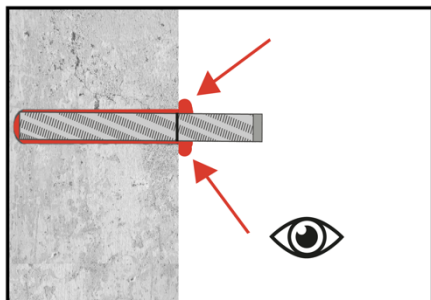


8. Annular gap between anchor rod and base material must be completely filled with mortar. Otherwise, the installation must be repeated starting from step 6 before the maximum working time reached.

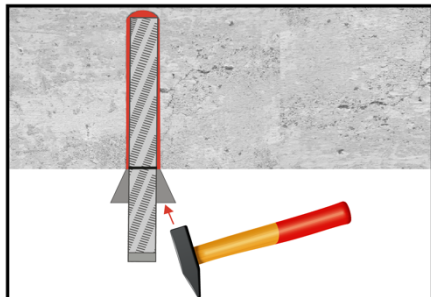

9. For overhead application the anchor rod should be fixed (e.g. wedges).

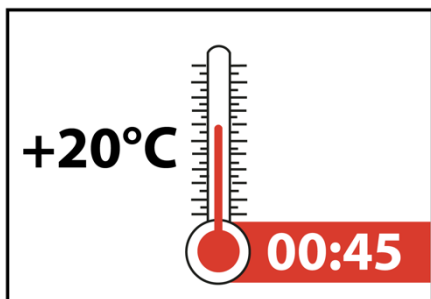

10. Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured. (attend Table B3)

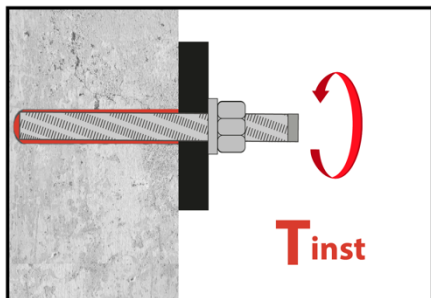

11. After full curing, the add-on part can be installed with the max. torque (Table B1A) by using a calibrated torque wrench. In case of static requirements (e.g. seismic), fill the annular gap in the fixture with mortar.

EASF Vinylester Anchoring Adhesive

Installation instructions

Annex B6
of European Technical
Assessment
ETA-25/0040

Curing time

Table B3: Maximum working time and minimum curing time(min)

Temperature of base material	Temperature of cartridge	Maximum working time t_{work}	Minimum curing time ¹⁾ t_{load} OR t_{cure}
+5°C to +9°C	+5°C to +9°C	10	150
+10°C to +19°C	+10°C to +19°C	6	80
+20°C to +24°C	+20°C to +24°C	5	45
+25°C to +29°C	+25°C to +29°C	3	35

¹⁾ In wet or water filled holes the curing times must be doubled.

EASF Vinylester Anchoring Adhesive

Intended use
Curing time

Annex B7
of European Technical
Assessment
ETA-25/0040

Table C1: Characteristic values of tension loads under – static and quasi-static action

Size			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure ⁽¹⁾										
Steel failure with standard threaded rod grade 5.8										
Characteristic resistance	N _{Rk,s}	[kN]	18	29	42	78	122	176	228	280
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard threaded rod grade 8.8										
Characteristic resistance	N _{Rk,s}	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard threaded rod grade 10.9										
Characteristic resistance	N _{Rk,s}	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ _{Ms}	[-]	1,40							
Steel failure with standard threaded rod grade 12.9										
Characteristic resistance	N _{Rk,s}	[kN]	44	70	101	188	294	424	551	673
Partial safety factor	γ _{Ms}	[-]	1,40							
Steel failure with standard stainless steel threaded rod A4-70										
Characteristic resistance	N _{Rk,s}	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ _{Ms}	[-]	1,87							
Steel failure with standard stainless steel threaded rod A4-80										
Characteristic resistance	N _{Rk,s}	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ _{Ms}	[-]	1,60							
Steel failure with standard high corrosion threaded rod grade 70										
Characteristic resistance	N _{Rk,s}	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ _{Ms}	[-]	1,87							
Combined pull-out and concrete cone failure (working life 50)										
Characteristic bond resistance in non-cracked concrete C20/25, working life 50 years										
Temperature range I: 40°C/24°C	τ _{Rk,ucr,50}	[N/mm ²]	15	13	12	12	11	10	9,5	8,5
Temperature range II: 80°C/50°C	τ _{Rk,ucr,50}	[N/mm ²]	12	10	10	10	9,0	7,5	6,5	6,5
Characteristic bond resistance in cracked concrete C20/25, working life 50 years										
Temperature range I: 40°C/24°C	τ _{Rk,cr,50}	[N/mm ²]	10	9,0	8,5	8,5	7,5	7,0	6,5	6,0
Temperature range II: 80°C/50°C	τ _{Rk,cr,50}	[N/mm ²]	8,0	7,0	7,0	7,0	6,0	5,5	5,0	5,0
Factors for cracked and non-cracked concrete C20/25										
Reduction factor for concrete	ψ ⁰ _{sus, 50}	40°C/24°C	0,77							
		80°C/50°C	0,70							
Increasing factor for concrete	ψ _c	C30/37	1,04							
		C40/50	1,07							
		C50/60	1,09							

¹⁾ in the absence of national regulations

EASF Vinylester Anchoring Adhesive

Performances

Characteristic resistance under tension loads in non-cracked concrete (Threaded rod)

Annex C1
of European Technical
Assessment
ETA-25/0040

Table C2: Characteristic values of tension loads under – static and quasi-static action**Concrete cone failure**

Factor for non-cracked concrete	$k_{ucr,N}$	[-]	11,0
Factor for cracked concrete	$k_{cr,N}$	[-]	7,7
Edge distance	$c_{cr,N}$	[mm]	$1,5 \cdot h_{ef}$
Spacing	$s_{cr,N}$	[mm]	$3,0 \cdot h_{ef}$

Splitting failure

Edge distance	$c_{cr,sp}$ for h_{min}	[mm]	$2,5 \cdot h_{ef}$	$2,0 \cdot h_{ef}$	$1,5 \cdot h_{ef}$
	$c_{cr,sp}$ for $h^2) \geq 2 \cdot h_{ef}$	[mm]	$c_{cr,Np}$		
Spacing	$s_{cr,sp}$	[mm]	$2,0 \cdot c_{cr,sp}$		

Installation safety factors for combined pull-out, concrete cone and splitting failure

Installation safety factors for dry and wet concrete	γ_{inst}	[-]	1,2
Installation safety factors for flooded bore hole	γ_{inst}	[-]	1,4

¹⁾ in the absence of national regulations ²⁾ h – concrete member thickness

EASF Vinylester Anchoring Adhesive**Performances**

Characteristic resistance under tension loads in non-cracked concrete -(Threaded Rod-Rebar)

Annex C2
of European Technical
Assessment
ETA-25/0040

Table C3: Characteristic resistance under shear load in non-cracked concrete – steel failure without leverarm

Size			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure with standard threaded rod grade 5.8										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	7	11	15	28	43	62	80	99
Partial safety factor	γ_{Ms}	[-]	1,25							
Ductility factor	k_7	[-]	0,8							
Steel failure with standard threaded rod grade 8.8										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	10	16	24	44	69	99	129	157
Partial safety factor	γ_{Ms}	[-]	1,25							
Ductility factor	k_7	[-]	0,8							
Steel failure with standard threaded rod grade 10.9										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	13	20	30	55	86	124	161	196
Partial safety factor	γ_{Ms}	[-]	1,50							
Ductility factor	k_7	[-]	0,8							
Steel failure with standard threaded rod grade 12.9										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	15	24	35	66	103	148	193	236
Partial safety factor	γ_{Ms}	[-]	1,50							
Ductility factor	k_7	[-]	0,8							
Steel failure with standard stainless steel threaded rod A4-70										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	9	14	21	39	60	87	113	137
Partial safety factor	γ_{Ms}	[-]	1,56							
Ductility factor	k_7	[-]	0,8							
Steel failure with standard stainless steel threaded rod A4-80										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	10	16	224	44	69	99	129	157
Partial safety factor	γ_{Ms}	[-]	1,33							
Ductility factor	k_7	[-]	0,8							
Steel failure with high corrosion stainless steel threaded rod grade 70										
Characteristic resistance	$V^0_{Rk,s}$	[kN]	9	14	21	39	60	87	113	137
Partial safety factor	γ_{Ms}	[-]	1,56							
Ductility factor	k_7	[-]	0,8							

EASF Vinylester Anchoring Adhesive

Performances

Characteristic resistance under shear loads in non-cracked concrete
(Threaded Rod)

Annex C3
of European Technical
Assessment
ETA-25/0040

Table C4: Characteristic values for shear load in non-cracked concrete – steel failure with lever arm

Size			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure with standard threaded rod grade 5.8										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	19	38	66	166	325	561	832	1125
Partial safety factor	γ _{Ms}	[-]	1,25							
Steel failure with standard threaded rod grade 8.8										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	30	60	105	266	519	898	1331	1799
Partial safety factor	γ _{Ms}	[-]	1,25							
Steel failure with standard threaded rod grade 10.9										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	37	75	131	333	649	1123	1665	2249
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard threaded rod grade 12.9										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	45	90	157	400	779	1347	1998	2699
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard stainless steel threaded rod A4-70										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	26	52	92	233	455	786	11165	1574
Partial safety factor	γ _{Ms}	[-]	1,56							
Steel failure with standard stainless steel threaded rod A4-80										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	30	60	105	266	519	898	1332	1799
Partial safety factor	γ _{Ms}	[-]	1,33							
Steel failure with high corrosion stainless steel threaded rod grade 70										
Characteristic resistance	M ⁰ _{Rk,s}	[Nm]	26	52	92	233	454	786	1165	1574
Partial safety factor	γ _{Ms}	[-]	1,56							

EASF Vinylester Anchoring Adhesive

Performances

Characteristic resistance under shear loads in non-cracked concrete
(ThreadedRod)

Annex C4
of European Technical
Assessment
ETA-25/0040

Table C5: Concrete edge failure

Size			M8	M10	M12	M16	M20	M24	M27	M30
Concrete edge failure										
Outside diameter of anchor	d_{nom}	[mm]	8	10	12	16	20	24	27	30
Effective length of anchor shear loading	l_f	[mm]	$\min(h_{ef}; 12d_{nom})$							
Installation Factor	y_{ins}	-	1							

Table C6: Concrete pry-out failure

Factor	k_8	-	2							
Installation Factor	y_{ins}	-	1							

Table C7: Displacement under tension load

Size			M8	M10	M12	M16	M20	M24	M27	M30
Characteristic displacement in non-cracked C20/25 to C50/60 concrete										
Temperature Range I : 40°C/24°C	$\delta_{N0-factor}$	[mm/(N/mm ²)]	0,02	0,03	0,04	0,04	0,04	0,05	0,06	0,06
	$\delta_{N\infty-factor}$	[mm/(N/mm ²)]	0,03	0,05	0,05	0,05	0,06	0,06	0,07	0,07
Temperature Range II: 80°C/50°C	$\delta_{N0-factor}$	[mm/(N/mm ²)]	0,05	0,05	0,06	0,06	0,07	0,07	0,08	0,12
	$\delta_{N\infty-factor}$	[mm/(N/mm ²)]	0,07	0,07	0,08	0,08	0,09	0,11	0,12	0,14
Characteristic displacement in cracked C20/25 to C50/60 concrete										
Temperature Range I : 40°C/24°C	$\delta_{N0-factor}$	[mm/(N/mm ²)]	0,09	0,09	0,06	0,06	0,06	0,06	0,06	0,06
	$\delta_{N\infty-factor}$	[mm/(N/mm ²)]	0,10	0,10	0,16	0,16	0,16	0,16	0,16	0,16
Temperature range II: 80°C/50°C	$\delta_{N0-factor}$	[mm/(N/mm ²)]	0,22	0,22	0,18	0,18	0,18	0,18	0,18	0,18
	$\delta_{N\infty-factor}$	[mm/(N/mm ²)]	0,28	0,28	0,26	0,26	0,26	0,26	0,26	0,26

Calculation of displacement: $\delta_{N0} = \delta_{N0-factor} \cdot r$; $\delta_N = \delta_{N\infty-factor} \cdot r$; (r – action bond stress for tension)

Table C8: Displacement under shear loads load

Size			M8	M10	M12	M16	M20	M24	M27	M30
Characteristic displacement in non-cracked C20/25 to C50/60 concrete										
Displacement (All temperature ranges)	$\delta_{V0-factor}$	[mm/(kN)]	0,07	0,07	0,06	0,05	0,04	0,04	0,03	0,03
	$\delta_{V\infty-factor}$	[mm/(kN)]	0,08	0,08	0,08	0,07	0,06	0,05	0,04	0,04
Characteristic displacement in cracked C20/25 to C50/60 concrete										
Displacement (All temperature ranges)	$\delta_{V0-factor}$	[mm/(kN)]	0,14	0,13	0,12	0,12	0,10	0,09	0,07	0,07
	$\delta_{V\infty-factor}$	[mm/(kN)]	0,20	0,19	0,16	0,15	0,11	0,10	0,09	0,09

Calculation of the displacement: $\delta_{N0} = \delta_{N0-factor} \cdot V$; $\delta_N = \delta_{N\infty-factor} \cdot V$; (V – applied shear load)

EASF Vinylester Anchoring Adhesive

Performances

Displacement (threaded rod)

Annex C5
of European Technical
Assessment
ETA-25/0040

Table C9: Characteristic values of tension loads under – static and quasi-static action

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Steel failure ⁽¹⁾											
Steel failure with reinforcing bar BSt 420											
Characteristic resistance	N _{Rk,s}	[kN]	21	33	48	65	85	132	206	258	338
Partial safety factor	γ _{Ms}	[-]	1,50								
Steel failure with reinforcing bar BSt 430											
Characteristic resistance	N _{Rk,s}	[kN]	22	34	49	66	87	135	211	265	346
Partial safety factor	γ _{Ms}	[-]	1,50								
Steel failure with reinforcing bar BSt 480											
Characteristic resistance	N _{Rk,s}	[kN]	24	38	54	74	96	151	236	298	386
Partial safety factor	γ _{Ms}	[-]	1,50								
Steel failure with reinforcing bar BSt 500											
Characteristic resistance	N _{Rk,s}	[kN]	25	39	57	77	101	157	246	308	402
Partial safety factor	γ _{Ms}	[-]	1,50								
Steel failure with reinforcing bar BSt 550											
Characteristic resistance	N _{Rk,s}	[kN]	28	43	62	85	111	173	270	339	442
Partial safety factor	γ _{Ms}	[-]	1,50								
Combined pull-out and concrete cone failure (working life 50)											
Characteristic bond resistance in non-cracked concrete C20/25, working life 50 years											
Temperature range I: 40°C/24°C	τ _{Rk,ucr,50}	[N/mm ²]	15	13	12	12	12	11	11	9,5	8,0
Temperature range II: 80°C/50°C	τ _{Rk,ucr,50}	[N/mm ²]	12	10	10	10	10	9,0	7,0	6,5	6,0
Characteristic bond resistance in cracked concrete C20/25, working life 50 years											
Temperature range I: 40°C/24°C	τ _{Rk,cr,50}	[N/mm ²]	10	9,0	8,5	8,5	8,5	7,5	7,0	6,0	5,5
Temperature range II: 80°C/50°C	τ _{Rk,cr,50}	[N/mm ²]	8,0	7,0	7,0	7,0	7,0	6,0	5,5	5,0	4,5
Factors for cracked and non-cracked concrete C20/25											
Reduction factor for concrete	ψ ⁰ _{sus, 50}	40°C/24°C	0,77								
		80°C/50°C	0,70								
Increasing factor for concrete	ψ _c	C30/37	1,04								
		C40/50	1,07								
		C50/60	1,09								

¹⁾ in the absence of national regulations

EASF Vinylester Anchoring Adhesive

Performances

Characteristic resistance under tension loads in non-cracked concrete (Rebar)

Annex C6
of European Technical
Assessment
ETA-25/0040

Table C10: Characteristic values of under shear load under static and quasi-static action

Size			Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32
Steel failure without lever arm											
Characteristic resistance	$V_{Rk,s}^0$	[kN]	$0,5 \times A_s \times f_{uk}^1$								
Crossection Area	A_s	[mm ²]	50	79	113	154	201	314	491	616	804
Partial safety factor	γ_{Ms}	[-]	1,5 ²⁾								
Ductulity factor	k_7	[-]	1,0								
Steel failure with lever arm											
Characteristic bending moment	$M_{Rk,s}^0$	[Nm]	$1,2 \times W_{el} \times f_{uk}$								
Crossection Area	A_s	[mm ³]	50	98	170	269	402	785	1534	2155	3217
Partial safety factor	$\gamma_{Ms,V}$	[-]	1,5 ²⁾								

Table C11: Concrete edge failure

Size		Ø8	Ø10	Ø12	Ø14	Ø16	Ø20	Ø25	Ø28	Ø32	
Concrete edge failure											
Outside diameter of anchor	d _{nom}	[mm]	8	10	12	16	20	24	27	30	32
Effective length of anchor shear loading	l _f	min (h _{ef} ; 12 x d _{nom})						min (h _{ef} ; 12 x 300mm)			
Installation Factor	y _{ins}	[-]	1								

Table C12: Concrete pry-out failure

Factor	k_8	-	2								
Installation Factor	γ_{inst}	-	1								

¹⁾ f_{uk} shall be taken from the specification of rebar.

²⁾ in the absence of national regulations

EASF Vinylester Anchoring Adhesive

Performances

Characteristic values of under shear load under static and quasi-static action(Rebar)

Annex C7
of European Technical
Assessment
ETA-25/0040

Table C13: Displacement under tension load											
Size			φ8	φ10	φ12	φ14	φ16	φ20	φ25	φ28	φ32
Characteristic displacement in non-cracked C20/25 to C50/60 concrete											
Temperature Range I : 40°C/24°C	δ _{N0-factor}	[mm/(N/mm²)]	0,02	0,03	0,03	0,03	0,04	0,05	0,05	0,05	0,06
	δ _{N∞-factor}	[mm/(N/mm²)]	0,04	0,04	0,05	0,05	0,05	0,06	0,06	0,06	0,06
Temperature range II: 80°C/50°C	δ _{N0-factor}	[mm/(N/mm²)]	0,04	0,05	0,07	0,08	0,08	0,09	0,11	0,12	0,13
	δ _{N∞-factor}	[mm/(N/mm²)]	0,07	0,07	0,09	0,11	0,13	0,15	0,17	0,17	0,18
Characteristic displacement in cracked C20/25 to C50/60 concrete											
Temperature Range I : 40°C/24°C	δ _{N0-factor}	[mm/(N/mm²)]	0,02	0,03	0,03	0,04	0,04	0,05	0,06	0,06	0,06
	δ _{N∞-factor}	[mm/(N/mm²)]	0,04	0,04	0,05	0,05	0,05	0,06	0,06	0,06	0,06
Temperature range II: 80°C/50°C	δ _{N0-factor}	[mm/(N/mm²)]	0,20	0,20	0,18	0,18	0,18	0,18	0,18	0,18	0,18
	δ _{N∞-factor}	[mm/(N/mm²)]	0,30	0,30	0,26	0,26	0,26	0,26	0,26	0,26	0,26
Calculation of the displacement: δ _{N0} = δ _{N0-factor} · r; δ _N = δ _{N∞-factor} · r ; (r – action bond stress for tension)											
Table C14: Displacement under shear loads load											
Size			φ8	φ10	φ12	φ14	φ16	φ20	φ25	φ28	φ32
Characteristic displacement in non-cracked C20/25 to C50/60 concrete											
Displacement (All temperature ranges)	δ _{V0-factor}	[mm/(kN)]	0,07	0,06	0,60	0,05	0,04	0,04	0,03	0,03	0,02
	δ _{V∞-factor}	[mm/(kN)]	0,09	0,09	0,08	0,07	0,07	0,07	0,06	0,05	0,04
Characteristic displacement in cracked C20/25 to C50/60 concrete											
Displacement (All temperature ranges)	δ _{V0-factor}	[mm/(kN)]	0,11	0,11	0,09	0,09	0,08	0,08	0,07	0,06	0,06
	δ _{V∞-factor}	[mm/(kN)]	0,17	0,17	0,02	0,15	0,13	0,13	0,11	0,11	0,09
Calculation of the displacement: δ _{N0} = δ _{N0-factor} · V; δ _N = δ _{N∞-factor} · V; (V – applied shear load)											

Table C15: Characteristic resistance for tension loads under – seismic action (C1)										
Size			M8	M10	M12	M16	M20	M24	M27	M30
Steel failure ⁽¹⁾										
Steel failure with standard threaded rod grade 5.8										
Characteristic resistance	N _{Rk,s}	[kN]	18	29	42	78	122	176	228	280
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard threaded rod grade 8.8										
Characteristic resistance	N _{Rk,s}	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ _{Ms}	[-]	1,50							
Steel failure with standard threaded rod grade 10.9										
Characteristic resistance	N _{Rk,s}	[kN]	37	58	84	157	245	353	459	561
Partial safety factor	γ _{Ms}	[-]	1,40							
Steel failure with standard threaded rod grade 12.9										
Characteristic resistance	N _{Rk,s}	[kN]	44	70	101	188	294	424	551	673
Partial safety factor	γ _{Ms}	[-]	1,40							
Steel failure with standard stainless steel threaded rod A4-70										
Characteristic resistance	N _{Rk,s}	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ _{Ms}	[-]	1,87							
Steel failure with standard stainless steel threaded rod A4-80										
Characteristic resistance	N _{Rk,s}	[kN]	29	46	67	126	196	282	367	449
Partial safety factor	γ _{Ms}	[-]	1,60							
Steel failure with standard high corrosion threaded rod grade 70										
Characteristic resistance	N _{Rk,s}	[kN]	26	41	59	110	172	247	321	393
Partial safety factor	γ _{Ms}	[-]	1,87							
Combined pull-out and concrete cone failure										
Characteristic bond resistance in non-cracked and cracked concrete C20/25										
Temperature range I: 40°C/24°C	τ _{Rk,eq,C1}	[N/mm²]	4,24	4,85	4,19	3,97	3,47	3,55	2,87	3,12
Temperature range II: 80°C/50°C	τ _{Rk,eq,C1}	[N/mm²]	3,39	3,83	3,49	3,08	2,72	2,79	2,40	2,60
Installation factor dry and wet condition	ψ _{ins}	[-]	1,2							
Installation factor flooded hole condition			1,4							
Increasing factor for concrete	ψ _c	C30/37	1,04							
		C40/50	1,07							
		C50/60	1,09							

Table C17: Characteristic resistance for shear loads under – seismic action (C1)										
Steel failure										
Characteristic Shear Resistance	V _{Rk,s,eq,C1}	[kN]	0,7 x V ⁰ _{Rk,s}							
Partial factor ¹⁾	γ _{Ms}	[-]	See Annex C3 - Table C3							
¹⁾ in the absence of national regulations										
Factor for annular gap	a _{gap}	[-]	0,5 (1,0) ²⁾							
²⁾ Value in brackets valid for filled annular gap between anchor and clearance in the fixture.										
EASF Vinylester Anchoring Adhesive							Annex C9 of European Technical Assessment ETA-25/0040			
Performances										
Characteristic resistance for tension and shear loads under seismic action C1 (Threaded Rod)										

Table C18: Characteristic resistance for tension loads under – seismic action (C1)

Size			ϕ8	ϕ10	ϕ12	ϕ14	ϕ16	ϕ20	ϕ25	ϕ28	ϕ32
Steel failure ⁽¹⁾											
Steel failure											
Characteristic resistance	N _{Rk,s,eq,C1}	[-]	0,5 x A _s x f _{uk} ¹⁾								
Cross section area	A _s	[mm ²]	50	79	113	154	201	314	491	616	804
Partial safety factor	γ _{Ms, N}	[-]	1,5 ²⁾								
Combined pull-out and concrete cone failure											
Characteristic bond resistance in non-cracked and cracked concrete C20/25											
Temperature range I: 40°C/24°C	τ _{Rk,eq,C1}	[N/mm ²]	4,24	4,11	3,96	3,53	3,96	3,81	3,35	3,12	3,12
Temperature range II: 80°C/50°C	τ _{Rk,eq,C1}	[N/mm ²]	3,39	3,20	3,03	2,86	3,22	2,79	2,63	2,60	2,34
Installation factor dry and wet condition	ψ _{ins}	[-]	1,2								
Installation factor flooded hole condition			1,4								
Increasing factor for concrete	ψ _c	C30/37	1,04								
		C40/50	1,07								
		C50/60	1,09								

Table C19: Characteristic resistance for shear loads under – seismic action (C1)

Steel failure											
Characteristic Shear Resistance	$VR_{k,s,eq,C1}$	[kN]	$0,35 \times A_s \times f_{uk}^{1)}$								
Cross section area	A_s	[mm ²]	50	79	113	154	201	314	491	616	804
Partial factor	γ_{Ms}	[-]	1,5 ²⁾								
Factor for annular gap	a_{gap}	[-]	0,5 (1,0) ³⁾								

¹⁾ f_{uk} shall be taken from specification of rebar

²⁾ in the absence of national regulations

³⁾ Value in brackets valid for filled annular gap between anchor and clearance in the fixture.

EASF Vinylester Anchoring Adhesive

Performances

Characteristic resistance for tension and shear loads under seismic action C1(Rebar)

Annex C10
of European Technical
Assessment
ETA-25/0040